





SPECIFICATIONS:

- ⊗ Delivery up to 6 m³/h
- ⊗ Head up to 173 m
- ⊗ Rated motor power output up to 1.5 kW/2 Hp
- ⊗ Maximum overall pump diameter of 75 mm
- ⊗ DJ 1 - DJ 2 versions: delivery port of 1"
- ⊗ DJ 3 version: delivery port of either 1" or 1.25"
- ⊗ DJ 4 version: delivery port of either 1.25" or 1.5"
- ⊗ Maximum sand content of 50 g/m³
- ⊗ Insulation Class B and IP 68 Protection
- ⊗ Impeller and Diffuser in Plastic Composites
Discharge Head and Bottom Bracket in Brass
Pump Shaft in Steel 430
Motor Cover in Stainless Steel

Identification Code:

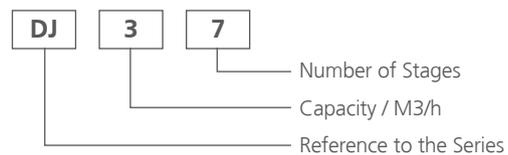


3" DJ 1 | 3" SUBMERSIBLE PUMPS | 50 HZ – 2 POLES – 2850 RPM

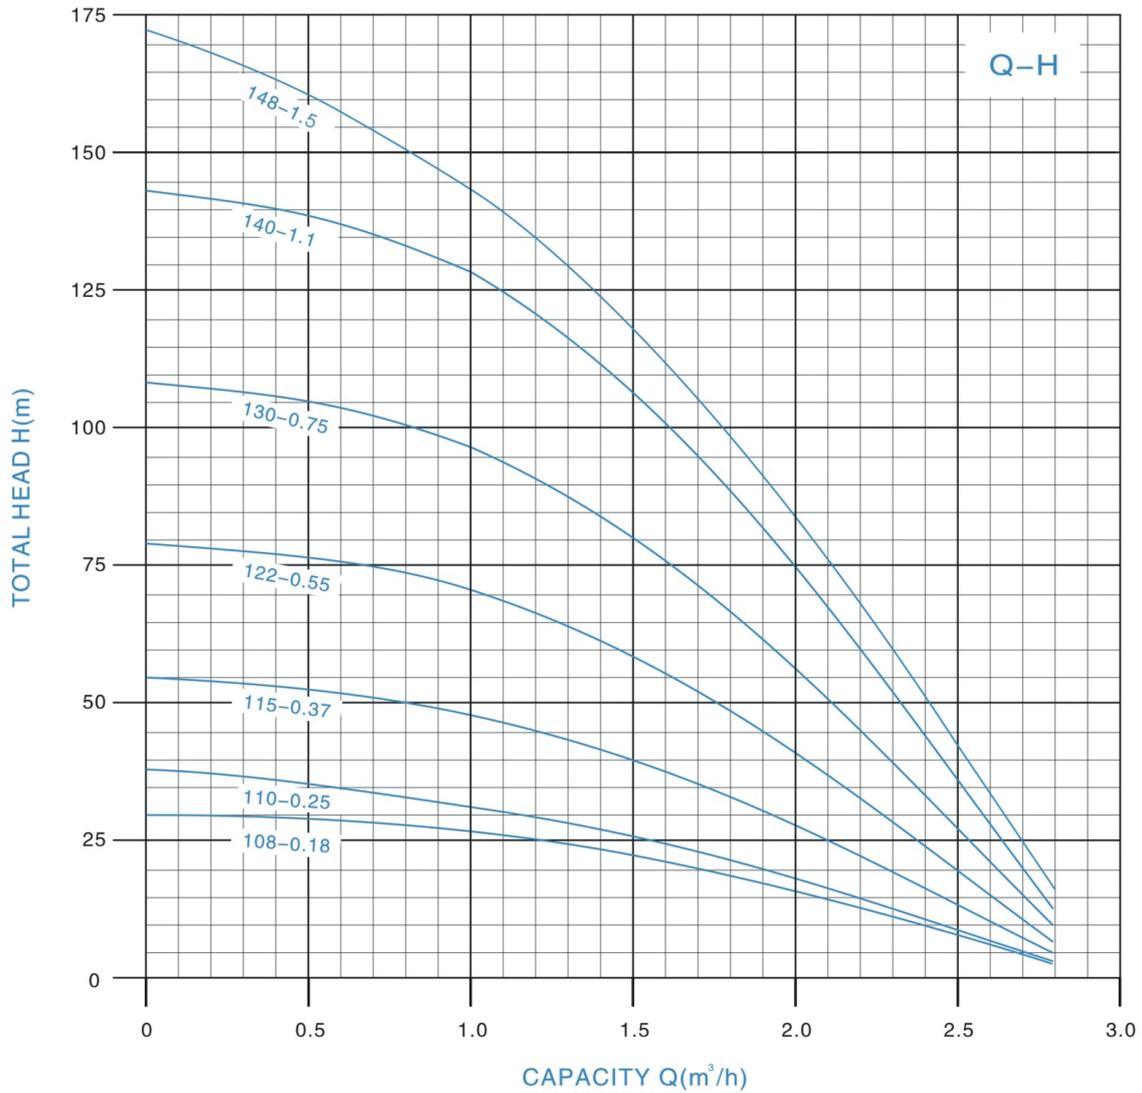


Type	N. of Stages	Motor		Pump		Q m³/h l/min	Delivery							
		KW	HP	Length (mm)	Outlet (inch)		0	0.5	1.0	1.5	1.8	2.0	2.5	2.8
							0	8	17	25	30	33	42	47
DJ 1-8	8	0.18	0.25	666	1"	Head H m	30	29	26	22	18	16	8	3
DJ 1-10	10	0.25	0.33	745	1"		38	36	33	28	23	20	10	4
DJ 1-15	15	0.37	0.50	917	1"		55	54	50	40	34	29	14	5
DJ 1-22	22	0.55	0.75	1148	1"		79	78	72	58	50	42	20	7
DJ 1-30	30	0.75	1.00	1389	1"		108	105	93	76	64	57	27	10
DJ 1-40	40	1.10	1.50	1699	1"		144	132	120	91	76	60	36	13
DJ 1-48	48	1.50	2.00	1974	1"		173	158	144	109	91	72	43	16

3" DJ 2 | 3" SUBMERSIBLE PUMPS | 50 HZ – 2 POLES – 2850 RPM

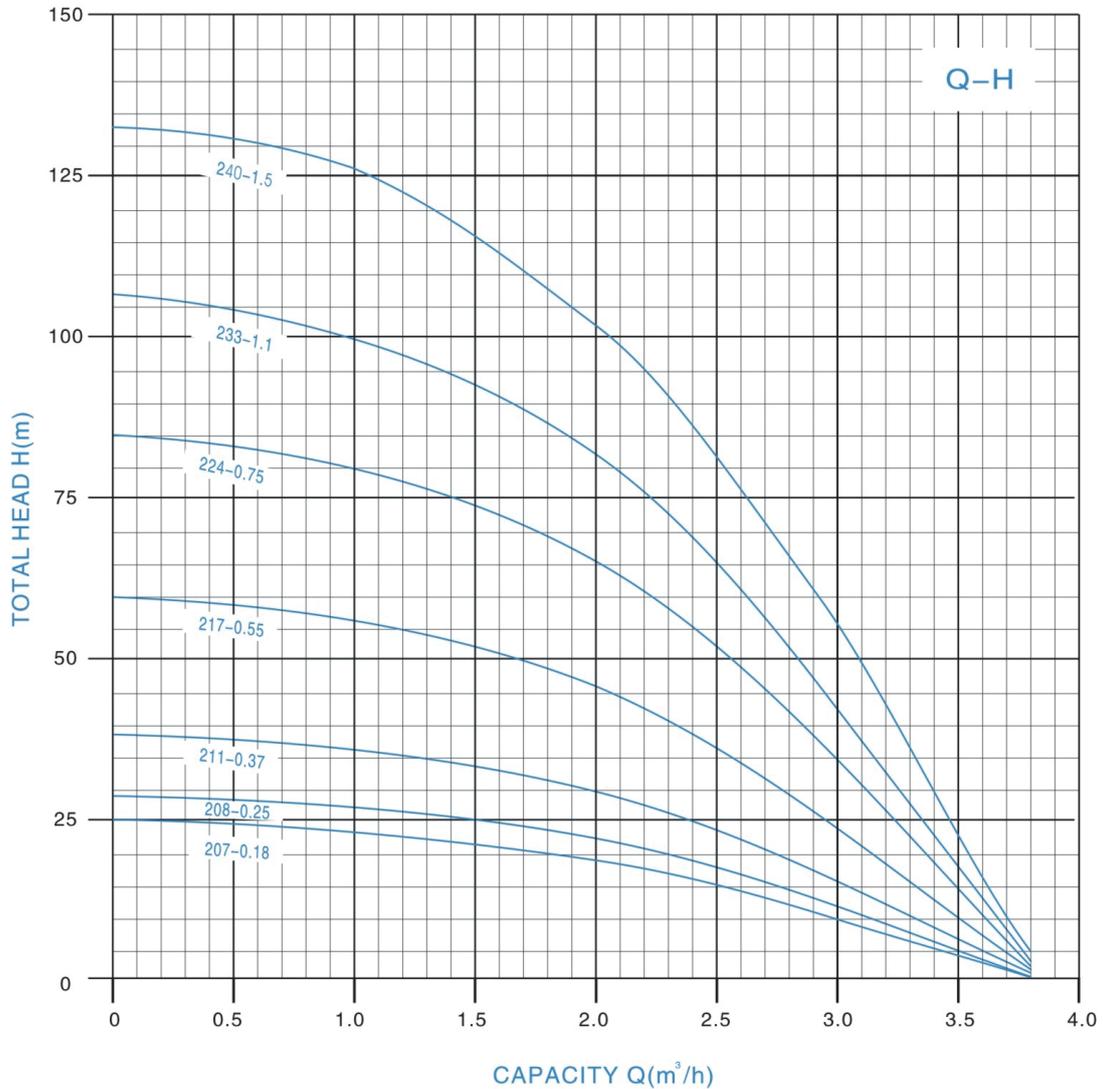


Type	N. of Stages	Motor		Pump		Q	Delivery								
		KW	HP	Length (mm)	Outlet (inch)		m3/h	0	0.5	1.0	1.5	1.8	2.0	2.5	3.0
						l/min	0	8	17	25	30	33	42	50	63
DJ 2-7	7	0.18	0.25	663	1"	Head H m	25	23	22	21	20	19	15	10	1
DJ 2-8	8	0.25	0.33	720	1"		28	27	26	25	23	22	17	11	1
DJ 2-11	11	0.37	0.50	828	1"		39	37	36	34	32	30	24	15	2
DJ 2-17	17	0.55	0.75	1054	1"		60	58	56	52	49	46	37	23	3
DJ 2-24	24	0.75	1.00	1316	1"		85	82	79	74	70	65	52	33	3
DJ 2-33	33	1.10	1.50	1604	1"		110	107	101	95	90	85	67	42	4
DJ 2-40	40	1.50	2.00	1943	1"		133	130	126	115	109	103	81	51	5

3" DJ 3 | 3" SUBMERSIBLE PUMPS | 50 HZ – 2 POLES – 2850 RPM

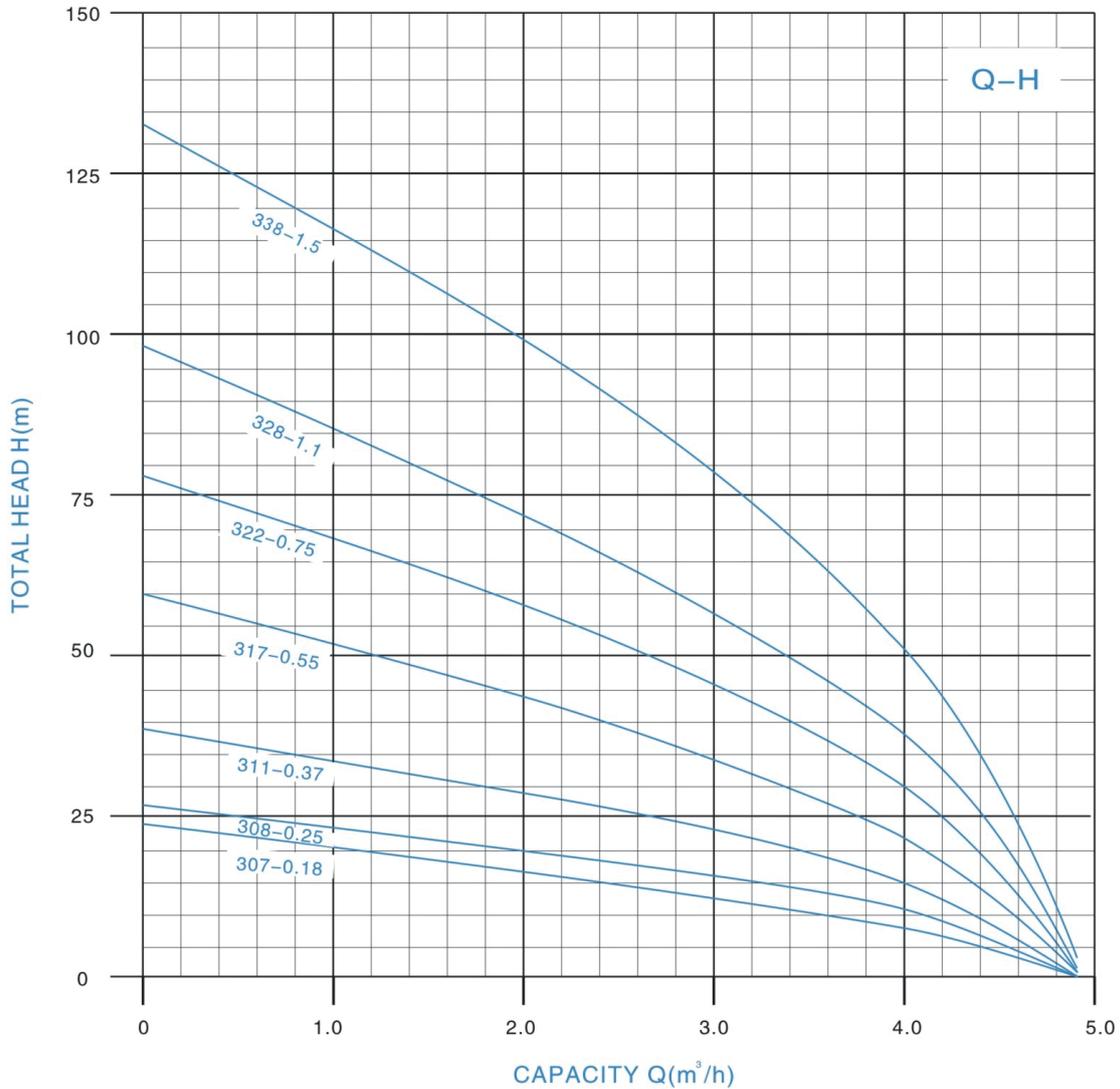

Type	N. of Stages	Motor		Pump		Q	Delivery								
		KW	HP	Length (mm)	Outlet (inch)		m3/h	0	1.0	1.5	2.0	2.5	3.0	3.5	4.0
DJ 3-7	7	0.18	0.25	719	1" or 1.25"	Head H m	0	17	25	33	42	50	60	67	83
DJ 3-8	8	0.25	0.33	782			24	20	18	17	15	13	11	8	0
DJ 3-11	11	0.37	0.50	904			27	24	22	20	18	16	13	11	0
DJ 3-17	17	0.55	0.75	1174			39	34	31	29	26	23	19	15	0
DJ 3-22	22	0.75	1.00	1421			60	51	48	44	40	34	29	22	1
DJ 3-28	28	1.10	1.50	1657			78	66	62	58	51	45	38	30	1
DJ 3-38	38	1.50	2.00	2087			98	84	78	72	65	57	48	38	2
							133	114	106	98	88	77	65	52	3

3" DJ 4 | 3" SUBMERSIBLE PUMPS | 50 HZ – 2 POLES – 2850 RPM

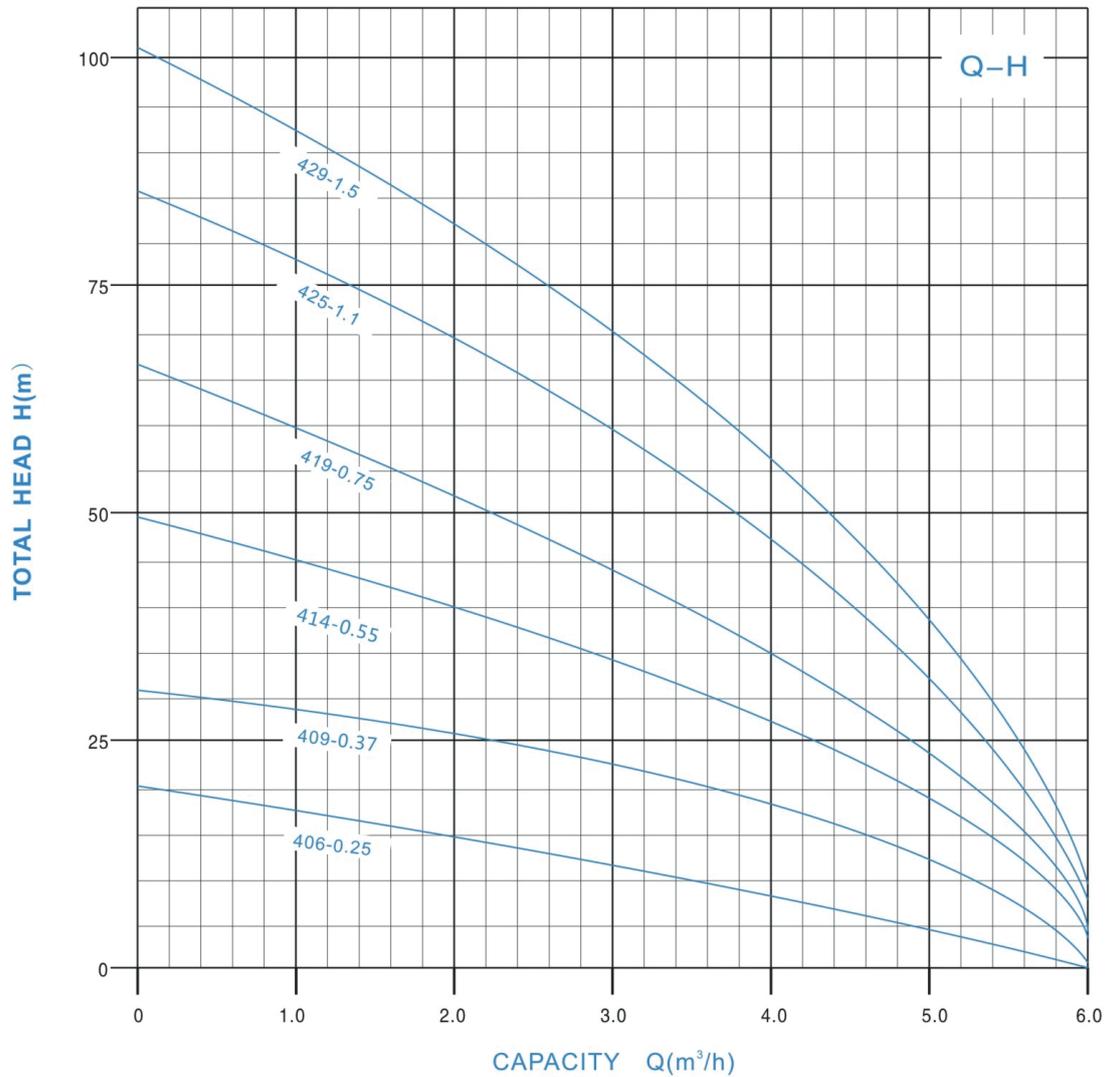

Type	N. of Stages	Motor		Pump		Q	Delivery							
		KW	HP	Length (mm)	Outlet (inch)		m ³ /h	0	1.0	2.0	3.0	4.0	5.0	6.0
							l/min	0	17	33	50	67	83	100
DJ 4-6	6	0.25	0.33	732	1.25" or 1.5"	Head H m	21	20	18	13	11	7	0	
DJ 4-9	9	0.37	0.50	863			31	29	26	21	17	11	1	
DJ 4-14	14	0.55	0.75	1113			49	46	40	33	26	18	3	
DJ 4-19	19	0.75	1.00	1336			67	63	55	45	36	24	4	
DJ 4-25	25	1.10	1.50	1627			86	81	70	59	46	32	7	
DJ 4-29	29	1.50	2.00	1786			102	98	84	71	57	39	8	